

MP-3000

Combining high performance with cost-effective design concept, MP-3000 is a great choice for budget-concerning customers. The sturdy but shaped plastic mechanical design represents FEC's persistence in quality and taste. With abundant I/O access, MP-3000 provides great connectivity and considerable integrated peripheral options. Equipped with 270W power supply, the terminal is powerful enough to run Dual-Core CPU and to drive devices powered from the system COM ports.



- Built-in customer display for space saving
- Front panel IP54 compliant for dust and water spill resistance
- Easy maintenance for system parts, such as HDD, CF, RAM, and CPU
- Strong system performance boost possibility with Dual-Core CPU support and 2 x memory DIMM sockets
- Integrated cable cover for enhancing the cable attachment and also supporting pole-type VFD




I/O Connector Panel

Front Panel



Back Panel

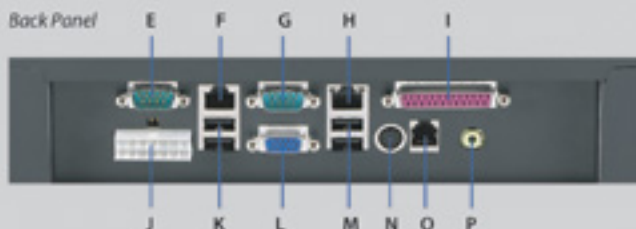

- A. Power Switch with LED
- B. HDD LED
- C. LAN LED
- D. USB

- E. COM 1
- F. COM 5
- G. COM 2
- H. LAN
- I. Parallel Port
- J. Power In
- K. USB
- L. VGA
- M. USB
- N. K/B
- O. Cash Drawer
- P. Audio Out

Specifications

Model	MP-3275
Processor	Intel Celeron 440, 2GHz (Default) / Dual-Core E2160 (1.8GHz)
Memory	512MB standard, maximum 2GB (2 x 240-pin DDR2 SDRAM)
Touch LCD Display	
Size / Resolution	15" TFT LCD / 1024 X 768
Brightness	250 / 350 cd/m ²
Touch Screen	5 / 4 wire Resistive
I/O Connectivity	
Serial Port	<ul style="list-style-type: none"> • 3 x External : COM1, COM2 (D-Sub) & COM5 (RJ45) with 5V/12V/Rt power supply selectable • 3 x Internal : COM3 for Primary Touchscreen, COM4 for built-in LCM display, COM6 reserved
Parallel Port	1 x Bi-directional Parallel Port
USB Port	8 x USB 2.0 (5 x external: 1 in front, 4 in rear ; 3 x internal)
Cash Drawer Port	1 x 12V RJ11 port
PS/2	1 x Keyboard
LAN Port	1 x RJ45 10/100 Base-T
Video Port	1 x VGA (D-Sub 15-pin)
Audio Port	1 x Line-out
Storage Device	1 x 2.5" 80GB SATA HDD 1 x CF Card (optional)
Speaker	Integrated 2W x 2 stereo speakers
LCM Customer Display	Built-in blue polarizer with bright white backlight (Large 20x2 9mm characters)
Power Supply	270W External Power Supply with 12V/24V output support
Construction	ABS+SECC
Housing Color	Charcoal+Silver
O/S Supported	Windows XP, WEPOS, Vista, Fedora, SuSE Linux
Dimensions (W x H x D)	382 x 356 x 285 mm (without cable cover) / 382 x 356 x 388 mm (with cable cover)
EMI/Safety	CE, FCC
Operating Temperature	0°C ~ 40°C
Optional Peripherals	
Magnetic Stripe Card Reader	Integrated MCR single/dual/triple Track
Wireless Module	Integrated 802.11b/g wireless LAN module / CDMA or GPRS module

All product specifications are subject to change without notice.



FEC

FIRICH ENTERPRISES CO., LTD.
10F., No.75, Sec. 1, Sin Tai Wu Rd., Sijhih City,
Taipei County 221, Taiwan R.O.C.
tel + 886 2 2698 1446 fax + 886 2 2698 1451
www.firich.com.tw

Firich China - Crimson
Room 1508, No. 818, NanJing(West) Road,
JingAn District, Shanghai City, China (Post Code : 200041)
tel + 86 21 5109 6766 fax + 86 21 2301 0268
www.firich.com.cn

Firich Korea Inc.
506 Daerung, 8th Kasan-Dong,
481-11 Geumcheon, Seoul, Korea
tel + 82 2 837 6610 fax + 82 2 837 8070
www.firich.co.kr

Firich USA Inc.
41668 Christy Street, Fremont, CA 94538, USA
tel + 1 510 683 9188 fax + 1 510 683 9288
sales@firichusa.com
www.firichusa.com